MicroNet



BACnet Zone Controller

The TAC I/A Series® MicroNet BACnet Zone Controller is an interoperable controller with native BACnet MS/TP communications support. The controller features: three universal inputs; three digital (Triac) outputs; one universal output; Sensor Link (S-Link) support; LED status indication; and an "I-Am" button.

When programmed using WorkPlace Tech Tool, the Zone Controller provides a wide range of control strategies for applications such as unit heaters, cabinet heaters, fan coil units, small unit ventilators, heat pumps, and single/dual loop control strategies.

The MicroNet BACnet Zone Controller can function either in a standalone mode or as part of a BACnet building automation system (BAS) network.

SPECIFICATIONS

HARDWARE

Dimensions
3-5/8 H x 5 W x 1-19/32 D in
(92 x 127 x 41 mm).

Enclosure
Conforms to NEMA-1. Meets UL 94-5VA flammability ratings for plenum application use.

Mounting
Panel mount.

Power Supply Input
20.4 to 30 Vac, 50/60 Hz.

Power Consumption
15 VA at 24 Vac plus DO loads.

AGENCY LISTINGS

US
UL 916, File #E71385 Category PAZX FCC Part 15, Class A.

Canadian
UL Listed to Canadian Safety Standards (CAN/CSA 22.2).

Australian
Meets requirements to bear the C-Tick Mark.

BTL Listing
B-ASC

European Community
EMC Directive 89/336/EEC
EN61326

AMBIENT LIMITS

Operating Temperature
32 to 131 °F (0 to 55 °C).

Shipping and Storage Temperature
-40 to 160 °F (-40 to 71 °C).

Humidity
5 to 95% non-condensing.

WIRING TERMINALS

Fixed Screw terminals
single AWG #14 (2.08 mm^2) wire or up to two AWG #18 (0.823 mm^2) or smaller wires.

INPUTS FROM MN-SX MICRONET™ SENSOR

Space Temperature
32 to 122 °F (0 to 50 °C).

Space Humidity
5 to 95% RH, non-condensing.

Local Setpoint
Adjustable within limits set by application programming tool.

Override Pushbutton
For standalone occupancy control or occupancy override.

Specifications continued on next page.

Schneider Electric

Specifications continued from first page.

Fan Operation and Speed Mode
On/off, speed (low/medium/high), or auto.

System Mode
Heat, cool, off, or auto.

Emergency Heat
Enable or disable.

UNIVERSAL INPUTS (3)
Universal Input characteristics are software-configured to respond to one of the following input types:

10 k ohm Thermistor with 11 k ohm Shunt Resistor
Sensor operating range -40 to 250 °F (-40 to 121 °C), TAC model TSMN-57011-850, TS-5700-850 series, or equivalent.

1 k ohm Balco
-40 to 250 °F (-40 to 121 °C), TAC model TSMN-81011, TS-8000 series, or equivalent.

1 k ohm Platinum
-40 to 240 °F (-40 to 116 °C), TAC model TSMN-58011, TS-5800 series, or equivalent.

1 k ohm Resistive
0 to 1500 ohms.

10 k ohm Resistive
0 to 10.5 k ohms.

Analog Voltage
Range 0 to 5 Vdc.

Analog Current
Range 0 to 20 mA, requires external 250 ohm shunt resistor (AD-8969-202).

Digital
Dry switched contact; detection of closed switch requires less than 300 ohms resistance; detection of open switch requires more than 2.5 k ohms.

Standard Pulse Input
Minimum Rate
1 pulse per 4 minutes.

Maximum Rate
1 pulse per second.

DIGITAL OUTPUTS – TRIAC (3)

DO1 plus DO2 Rating
24 VA total at 24 Vac, 50/60 Hz, high side switching.

DO3 Rating
12 VA at 24 Vac, 50/60 Hz, high side switching

UNIVERSAL OUTPUT (1)

0 to 20 mA
Output load from 80 to 550 ohms.

0 to 10 V
With external 500 ohms, 1/2 W, 1% resistor.

Capable of Driving Functional Devices
RIBUI1C Relay
UO configured for 0 to 20 mAdc, no external resistor.

MODEL

Model	Inputs and Outputs		
	UI	UO	DO (Triac)
MNB-70	3	1	3

OPTIONS


MNA-FLOd-1	TAC MicroNet enclosure, used if wiring to flexible conduit is required
S-Link Sensors	Temperature and humidity wall sensors with digital communication
TSMN Series	Room temperature sensors

© 2009 Schneider Electric. All rights reserved.

FEATURES

- The MicroNet BACnet Zone Controller's sequence of operation and BACnet image are fully programmable using WorkPlace Tech Tool. The controller can be applied to all common zone HVAC applications.
- Capability to function in standalone mode or as part of a BACnet building automation network.
- Integral MS/TP jack for direct connection of PC with WorkPlace Tech Tool.
- DIP switch addressable.
- Service pin button for BACnet "I am" message broadcast.
- Isolated EIA-485 transceiver for MS/TP communications.
- MS/TP baud rate selection from 9.6 up to 76.8 kbaud.
- LED indication of MS/TP communication activity and controller status.
- Firmware upgradeable over the network.

ZONE CONTROLLER TERMINALS

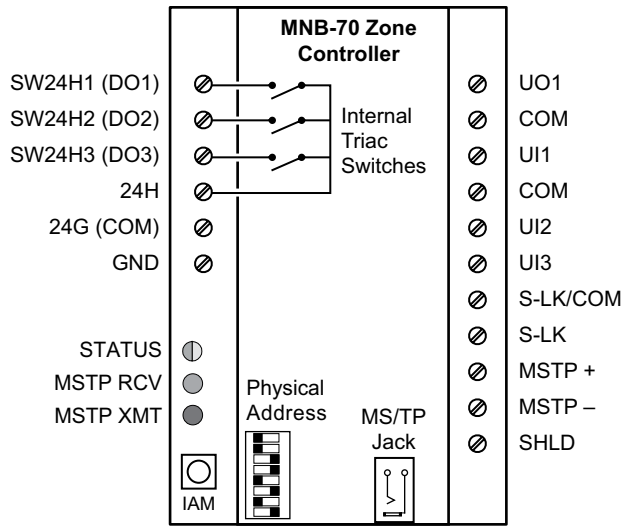

COMMUNICATIONS

BACnet Networks

The MicroNet BACnet Zone Controller incorporates an isolated EIA-485 transceiver for BACnet MS/TP communications at 9.6 up to 76.8 kbaud using standard MS/TP wiring methods. Up to 128 TAC MicroNet BACnet controllers can be connected to an MS/TP sub-net without repeaters.

S-Link

The Sensor Link (S-Link) communications wiring provides power and a communication interface for one MN-Sx TAC I/A Series MicroNet sensor. The various MN-Sx sensors can provide room temperature, room humidity, setpoint adjustment, and occupancy override. This connection uses two-wire, unshielded cable and is not polarity sensitive. Maximum S-Link bus length is 200 ft (61 m).


BACNET COMPLIANCE

BACnet Application Specific Controller (B-ASC).

BACnet is a registered trademark of ASHRAE. ASHRAE does not endorse, approve, or test products for compliance with ASHRAE standards. Compliance of listed products to the requirements of ASHRAE Standard 135 is the responsibility of BACnet International (BI). BTL is a regstered trademark of BI.

© 2009 Schneider Electric. All rights reserved.

ARCHITECTURE

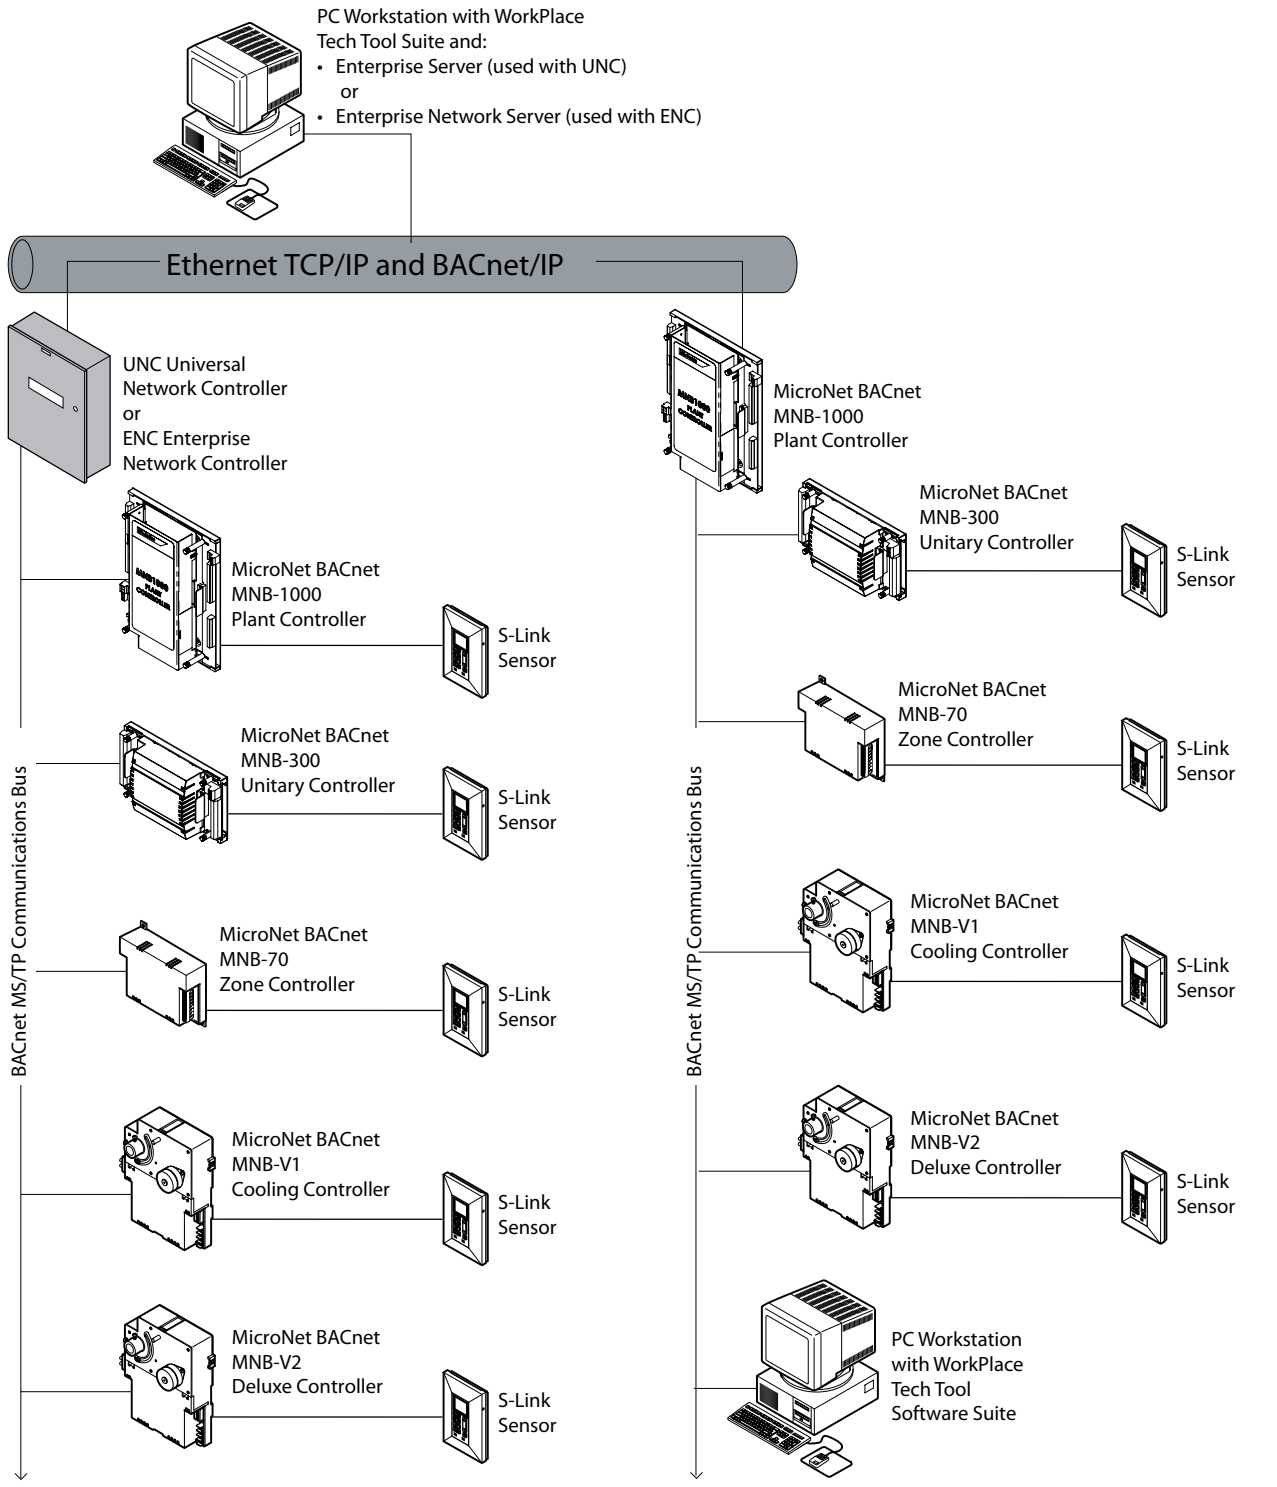

LISTED

On October 1st, 2009, TAC became the Buildings Business of its parent company Schneider Electric. This document reflects the visual identity of Schneider Electric, however there remains references to TAC as a corporate brand in the body copy. As each document is updated, the body copy will be changed to reflect appropriate corporate brand changes.

All brand names, trademarks and registered trademarks are the property of their respective owners. Information contained within this document is subject to change without notice.

Schneider Electric 1354 Clifford Avenue, P.O. Box 2940, Loves Park, IL 61132-2940, USA 1-888-444-1311 www.schneider-electric.com/buildings

© 2009 Schneider Electric. All rights reserved.